



Standard equipment

Designed to transport equipment requiring a minimal loading angle, the Slide Tax™ is ideal for transporting equipment such as asphalt pavers, rollers, fork lifts, hydraulic scissor lifts, tractors, mini excavators, loaders, etc.

Once loaded, the axles are positioned to ensure the proper load transfer to truck. (Unlike regular tilt trailers).

Options :

- Two 2-speed Jacks
- Hydraulic winch 10 000 or 12 000 lbs.
- Electric control valve
- Wireless remote for winch
- Service lights
- Tool boxes
- Spare wheel & tire
- Tag-along hitch with pintle eye
- Hydraulic brakes
- Hot dip Galvanizing

Width : 102" over all width

Length : Deck
24' / 28' / 32'

Deck Height : 41"

Axles : Leaf spring :
10 000, 12 000 ou
15 000 lbs. each

Brakes : Electric brakes
with emergency
break-away system and
charger

Landing Gear : Two
12 000lb. Drop-leg jacks

Tie-downs : 14 banjo
eye chain hooks

GVWR : 20K, 24K, 30K

Loading Angle : 12
degrees on 24' deck

Hitch attachment : 2
5/16" gooseneck coupler
or 2" king pin for fifth
wheel

Side rails : Stake pockets
every 24" with 2" tie rail

Cross members : 3"
Channel every 16"

Floor : 1 5/8" hemlock

Paint : Epoxy primer,
urethane paint, 2"
conspicuity tape

Color : Black, dark grey

Power supply : 13 HP gas
engine with electric start

Hydraulic system : 6
GPM pump, 4 section
hydraulic valve

Lights : LED

ST SERIES

ST SERIES

ST SERIES




1020, Craig Nord, Cookshire (Québec) Canada

Tel.: 819-875-5326 888-875-6326

Fax.: 819-875-5367

Email: info@remorqueskerr.com

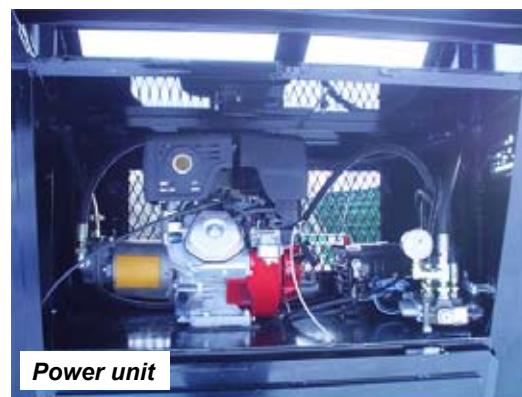

Power unit



Stainless steel control panel



All illustrations and specifications contained in this literature are based on the latest information available at time of publication. Certain equipment shown may be optional. The right is reserved to make changes in materials, equipment, designs, specifications and models.